

TOSHIBA

LOTTERY PRINTER

TOSHIBA PPR-3S01



LOTTERY PRINTER



PPR-3S01

TOSHIBA PPR-3S01 is a cutting edge high performance thermal receipt/ ticket/ lottery printer. It is a perfect choice & ultimate solution for gaming, retails, hospitality, entertainment, service and any high-speed transaction applications.

PRINTER FEATURES

- *Accommodates up to 6" paper roll*
- *Blazing fast print time* - Industry-leading 12 IPS max
- *Smooth performance* - 100 tickets stacking in order
- *Nice print quality* Industry-unique Dual Stages (2-Phase) Damping Mechanisms
- *Outstanding reliability* - 200 km Thermal Head Life & 2.0 M Cutter Life
- *High adaptability* - Dual Paper Low Sensing mode (Paper OD & End-of-Roll Stripe)
- *Adjustable & detachable* Paper Stopper
- *Splendid versatility* - Manifold I/O supports
- *Light weight & small* footprint
- *Modular design* for easy maintenance and replacement


TECHNICAL SPECIFICATIONS



Model Name	PPR-3S01
PERFORMANCE	
Print Speed	High Speed Mode 12 IPS (304.8 mm/s) Normal Mode 10 IPS (254.0 mm/s) High Quality Mode 8 IPS (203.2 mm/s)
Stacking Capacity	100 tickets stacking in order
Printing Method	Line thermal printing (Direct thermal method)
Sensor	Paper Jam, Black Mark, Paper End, Cover Open , Paper Near End
HARDWARE	
Interfaces	Mini-DIN Power, USB TYPE A, USB TYPE B, Cash Drawer as Standard RS232C or Ethernet as Option
Power Input	+24 VDC
Power Consumption	55 W/60 W
Thermal Head Life	200 km
Cutter Life	2.0 M cuts
Dimension	W 132.0 mm x D 269.4 mm x H 218.8 mm
Weight	1.5 kg
Temperature Range	5 ~ 50 °C
Humidity Range (No Condensation)	5 - 85 % RH
PRINT FONT	
Print Column Number	53 columns at standard fonts, 71 columns at compressed fonts in Font Mode1 49 columns at standard fonts, 64 columns at compressed fonts in Font Mode2
Code Page	437 (default) , 850, 852, 857, 858, 860, 863, 865, 866, 1252, 1253, 1254, 1256, 949
Line Spacing	7.52 LPI (default) and variable lines per inch
Barcode	UPC-A, UPC-E, JAN13 (EAN), JAN8 (EAN), Code 39, Code 128 Interleaf 2 of 5, Code-bar, PDF417, Code 93, QR, GS1 Databar
SUPPORTED MEDIA	
Paper Roll Diameter	Max 6" (152.4mm)
Paper Thickness	75 µm to 85 µm
Paper Width	80 mm/82.5 mm
GRAPHICS	
Print Resolution	203 x 203 DPI
SOFTWARE	
Windows Driver	Windows XP/7/8/10
OPOS	Yes
Java POS	Yes
Emulation	ESC / POS
Utility Software	Printer Setup Utility

ADDITIONAL INFORMATION

PRINTER DIMENSION

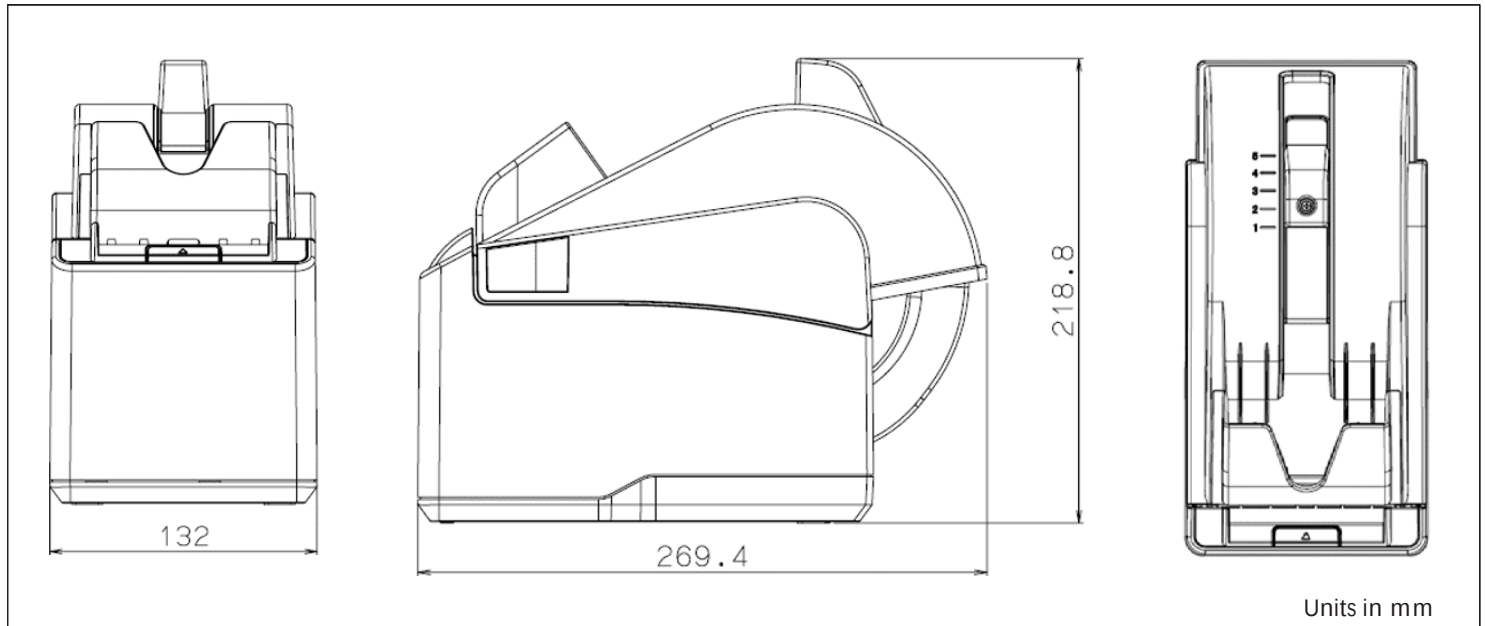

Connect with your Toshiba expert to see how our line of kiosk receipt printers can make all the difference in your business organization.

Toshiba Tec Singapore Pte Ltd.

2 Ang Mo Kio Street 62, Singapore 69138 Tel (65) 64819 488 www.toshibatec.com.sg

Contact us for further information about the printer

Louisse Lim

Business Development

Tel: (65) 9863 0046

Email: Louisse_Lim_rg@tecsg.com.sg

Rev 1.0